




# why! Replacing W670SZQ1 processor

Written By: Felice Suglia

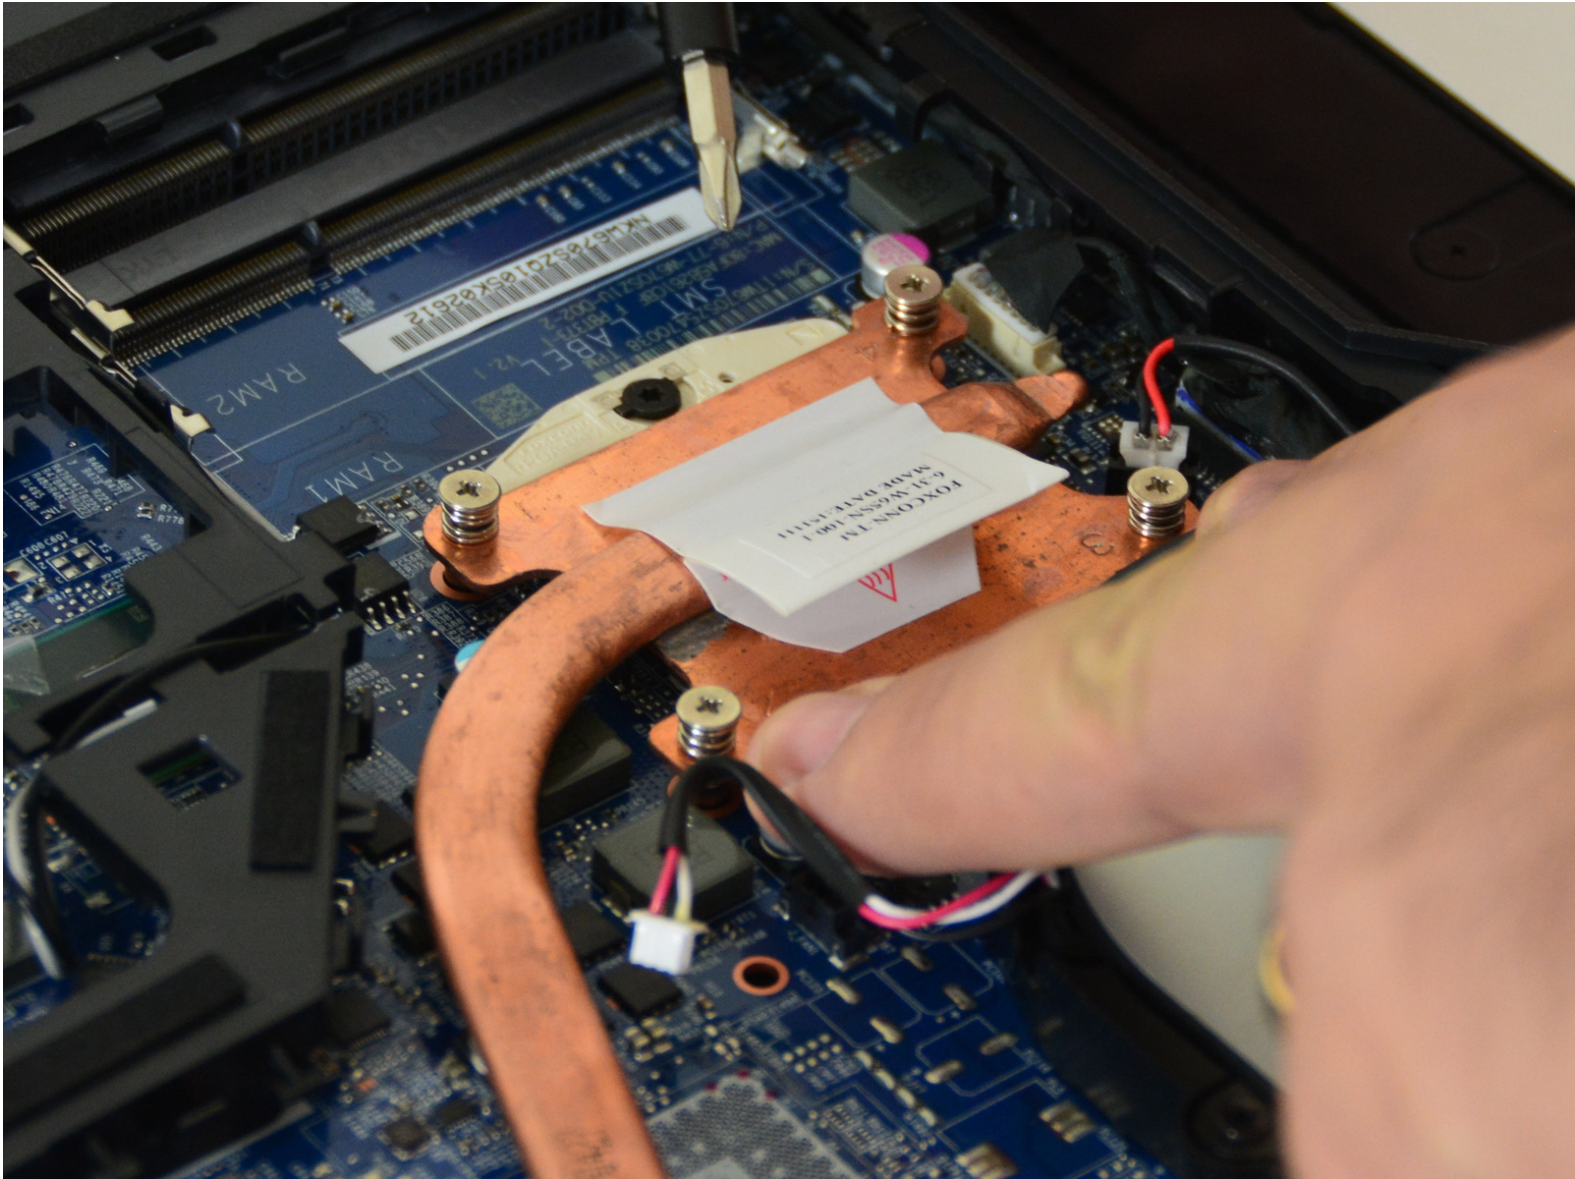


## Step 1 — accumulator



- Open the latch of the battery on the left side.
- Open the latch of the battery on the right side.
- Remove the battery where you simultaneously holding open the right bolt.


## Step 2 — Access to major components

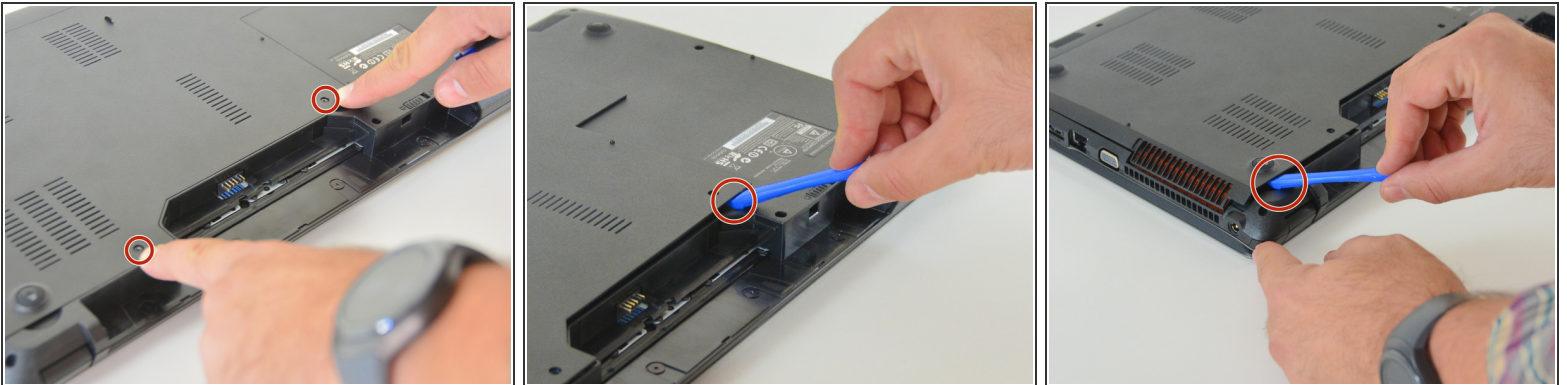

- Remove the Philips screwdriver to remove the two screws at the bottom of the cover.
- Lift the cover at the bottom right with the iFixit Opening Tool
- Lift the cover on the bottom left with the iFixit Opening Tool
- Finally, remove the cover so that the access to the main components is free.



## Step 3 — processor

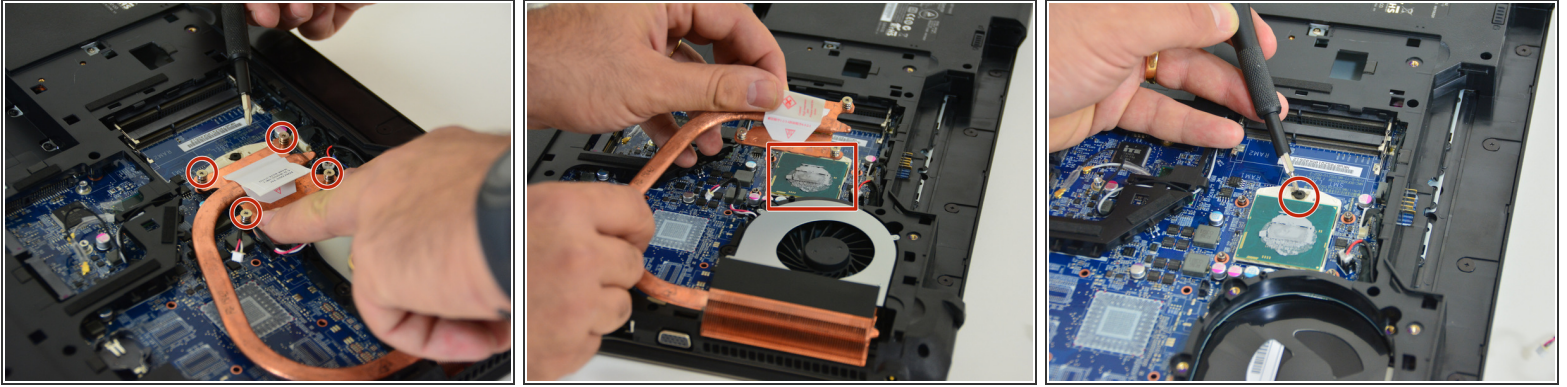

- With the Philips screwdriver to remove the 4 fixing screws of the cooler.
- Now remove the radiator. Sobal the cooler is removed, you can now see the processor with its locking.
- Unlock now the processor and remove lhns from its connector.

Arbeite die Schritte in umgekehrter Reihenfolge ab, um dein Gerät wieder zusammenzubauen.

This document was last generated on 2017-07-17 10:35:39 PM.